



KOMA PRECISION
THE KEY TO PERFORMANCE
www.komaprecision.com

Alberti

ANGLE HEAD

Selection Guide

2022



WE FOCUS ON BEING THE BEST—
that's why leading companies choose Koma.

WE ARE THE EXCLUSIVE NORTH AMERICAN
IMPORTER, NATIONAL DISTRIBUTOR, AND
SERVICE CENTER FOR ALBERTI ANGLE HEADS..




KOMA PRECISION

ABOUT US

For over forty years Koma Precision has been the foremost source for the finest the world has to offer in machine tool Productivity Innovation.

With over 30,000 rotary table installations, Koma is the largest distributor of Tsudakoma NC rotary tables and indexers in the world. With over 12,000 angle heads and live tools installed, Koma is the world's largest supplier for Alberti - the originator and the foremost innovator of productivity tooling.



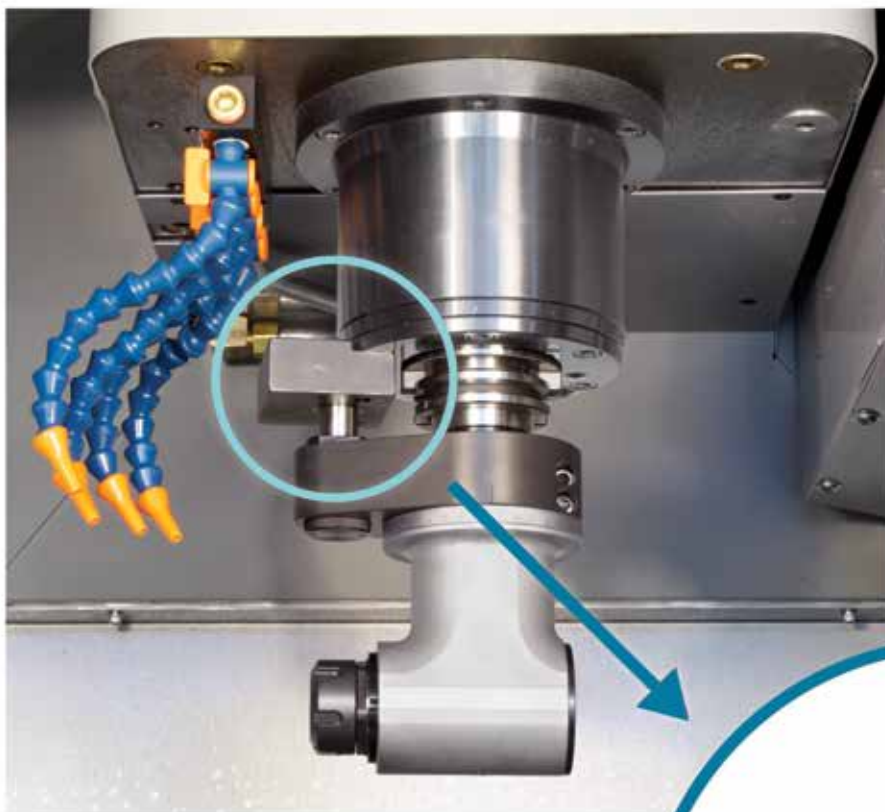

HAAS stop blocks for 50
taper machine included with
CAT40 Right Angle Heads.



40 TAPER VMC'S

Max. Tool Weight: 12 LBS



T90sl-0.3 Slimline Control Series			
Standard Tool Specifications			
Output	NSK		
RPM Max.	20,000		
Nm/ft.lbs.	1/.74 - 4/2.95		
Wgt.kg/lbs.	3.5/7.7		
Output Tools	Model	Ratio	RPM Max.
NSK Output Tool Options for T90sl-0.3	IC-300	1:3/4	15,000
	MFC-300S	1:1	15,000
	MFC-300M	1:1	15,000
	KC-300	1:3/4	15,000
	CN-01	1:1	15,000
	RA-100	1:3/8	7,490
	RA-200	1:0.6665	13,330



T90cn-0.5C Control Series	
Standard Tool Specifications	
Output	ER 11 (0.5-7)
Ratio	1:1
RPM Max.	6,000
Nm/ft.lbs.	5/3.7
Wgt.kg/lbs.	4/8.8
Options	
High Speed	10,000 RPM Maximum
Output	Weldon Output - 6mm
Coolant	Through Pin



T90cn-1.5 Control Series	
Standard Tool Specifications	
Output	ER 16 (1-10)
Ratio	1:1
RPM Max.	6,000
Nm/ft.lbs.	7/5.2
Wgt.kg/lbs.	4.3/9.5
Options	
High Speed	10,000 RPM Maximum
Output	Weldon Output - 10mm
	Arbor Output - 13mm
Coolant	Through Pin
	Through Pin & Spindle
	Through Shank



T90cn-2.5 Control Series	
Standard Tool Specifications	
Output	ER 25 (2-16)
Ratio	1:1
RPM Max.	6,000
Nm/ft.lbs.	20/14.7
Wgt.kg/lbs.	5.4/12
Options	
High Speed	8,000 RPM Maximum
Output	Weldon Output - 16mm
	Arbor Output - 16mm
Coolant	Through Pin
	Through Pin & Spindle
	Through Shank



TCUcn-1.5 Control Series	
Standard Tool Specifications	
Output	ER 20 (1-13)
Ratio	1:1
RPM Max.	6,000
Nm/ft.lbs.	6/4.4
Wgt.kg/lbs.	4.2/9.2
Options	
High Speed	8,000 RPM Maximum
Output	Weldon Output - 10mm
Coolant	Through Pin



T90cn-3.5 Control Series	
Standard Tool Specifications	
Output	ER 32 (2-20)
Ratio	1:1
RPM Max.	4,000
Nm/ft.lbs.	40/29.5
Wgt.kg/lbs.	5.5/12
Options	
High Speed	8,000 RPM Maximum
Coolant	Through Pin

50 TAPER VMC'S

Max. Tool Weight: 30 LBS



T90cn-2.5 Control Series	
Standard Tool Specifications	
Output	ER 25 (2-16)
Ratio	1:1
RPM Max.	6,000
Nm/ft.lbs.	20/14.7
Wgt.kg/lbs.	5.4/12
Options	
High Speed	8,000 RPM Maximum
Output	Weldon Output - 16mm Arbor Output - 16mm
Coolant	Through Pin Through Pin & Spindle Through Shank



T90cn-3.5 Control Series	
Standard Tool Specifications	
Output	ER 32 (3-20)
Ratio	1:1
RPM Max.	4,000
Nm/ft.lbs.	35/25.8
Wgt.kg/lbs.	10.9/24.2
Options	
High Speed	6,000 RPM Maximum
Output	Weldon Output - 20mm Arbor Output - 22mm
Coolant	Through Pin Through Pin & Spindle Through Shank




TCUcn-2.5 Control Series	
Standard Tool Specifications	
Output	ER 25 (2-16)
Ratio	1:1
RPM Max.	4,000
Nm/ft.lbs.	18/13.3
Wgt.kg/lbs.	6.8/15
Options	
High Speed	8,000 RPM Maximum
Output	Weldon Output - 16mm
Coolant	Through Pin




TCUcn-3.5 Control Series	
Standard Tool Specifications	
Output	ER 32 (3-20)
Ratio	1:1
RPM Max.	4,000
Nm/ft.lbs.	32/23.6
Wgt.kg/lbs.	12.8/28.6
Options	
High Speed	6,000 RPM Maximum
Output	Weldon Output - 20mm Arbor Output - 22mm
Coolant	Through Pin

Coolant Options


Coolant
Through
Pin



Coolant
Through
Pin &
Spindle



Coolant
Through
Shank



MAIN FEATURES

- One year warranty
- Double sealed front end
- High speed tools available
- Coolant feed through options

TECHNICAL FEATURES

- GS600 spheroidal cast iron bodies
- Shafts supported by ABEC 7 super precision angular contact bearings
- Highest performance spiral bevel gears strength in excess of 300 kg/mm²
- Control Series tools main input shaft is integral with the drive taper to ensure maximum rigidity



ABOUT

It takes just 15 minutes to supercharge your throughput with Alberti right angle and adjustable angle heads from KOMA Precision. An included HAAS stop block is easily installed in existing spindle holes.

Koma Precision stocks a comprehensive Alberti spare parts inventory and offers complete maintenance and repair services.



UNLOCK YOUR POTENTIAL TODAY!

For over 40 years Koma Precision Inc. has partnered with Tsudakoma and Alberti to become the market leader of the highest quality machine tool accessories. Tsudakoma Rotary Tables, Alberti Angle Heads and Driven Toolholders are synonymous with Excellence, Quality and Performance.

Koma Precision Inc. Tsudakoma installation base in our North American Market exceeds 30,000 rotary tables of various sizes and configurations.

Knowledge and Experience Matter.

Our three facilities with a combined total 39,000 sq/ft feature a completely equipped machine shop, state of the art inspection and test equipment, full product demonstration showroom along with a multi-million dollar new product and spare parts inventory.



20 Thompson Road
East Windsor, CT 06088

Tel: 1.800.249.5662

Fax: 860.623.4132
info@komaprecision.com



KOMA PRECISION
www.komaprecision.com

