


### Angle Head Dimensions

Reference Only • Detailed drawings available upon request

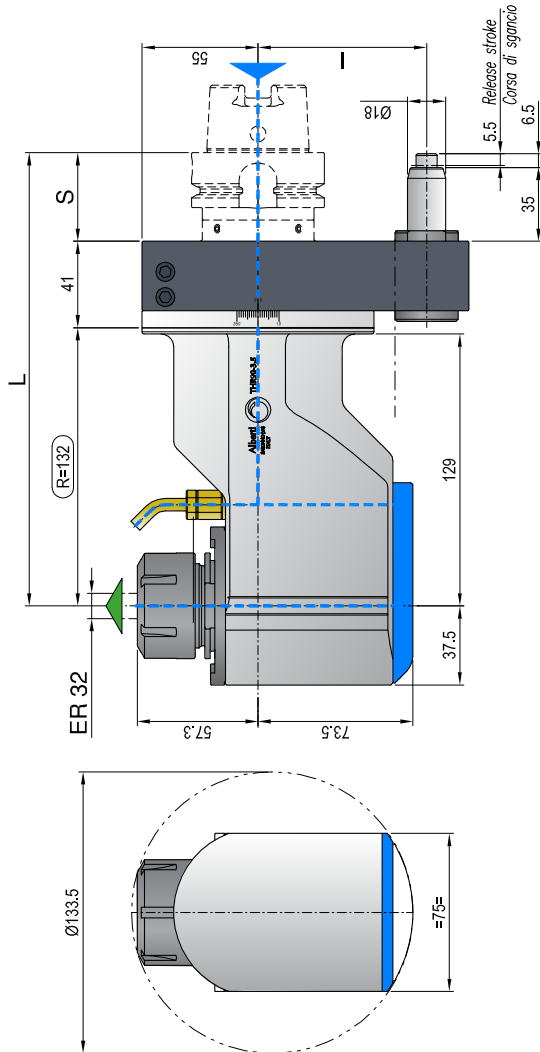

Direction of rotation same as machine spindle

Max coolant pressure 100bar, 1450 psi

- Also available without coolant. Maximum speed 5,000 min<sup>-1</sup>

### Technical Features



Ratio

1.1



RPM

8.000 min<sup>-1</sup>



Max. axial load

1250 N



Torque

70 Nm



Tapping

Max. M16



Collet

ER-32  
(ø2/20 mm)

| INPUT TAPER |           | SIZE  | I      | S  | L   |
|-------------|-----------|-------|--------|----|-----|
|             | DIN-69871 | 50    | 80-110 | 35 | 208 |
|             | CAT       |       |        |    |     |
|             | MAS-BT    | 50    | 80-110 | 41 | 214 |
|             | HSK       | 63-80 | 80-110 | 42 | 215 |
|             |           | 100   | 80-110 | 45 | 218 |
|             | CAPTO     | C6    | 80-110 | 38 | 211 |
|             |           | C8    | 80-110 | 40 | 213 |
|             | KM        | 63    | 80-110 | 40 | 213 |

\*Dual contact spindles optional

### PLUS

- Available without coolant. High Speed 5.000 min<sup>-1</sup>
- Increased torque thanks to bigger gears
- New drive system with pins for gear set
- One-hand wrench to tighten the tool