

T90cn-1.5 Neo


ACT9015C

Technical data

Caratteristiche tecniche



Minimum diameter without tool
Diametro minimo senza utensile

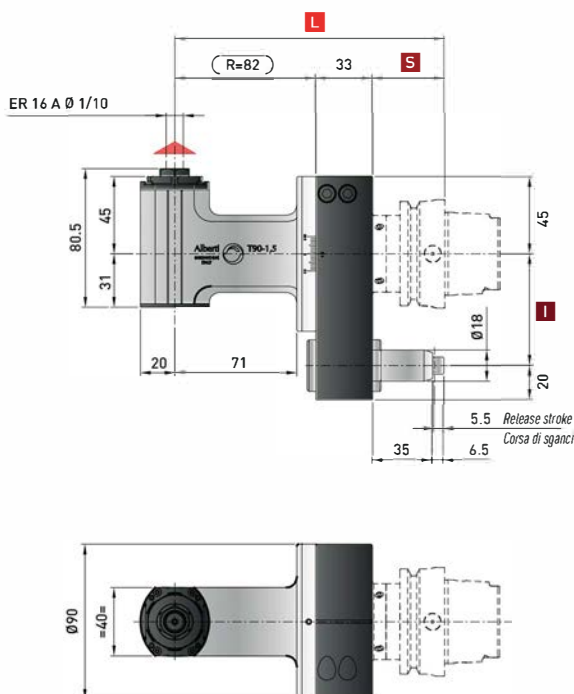

Retaining block / Tassello di ritegno / Stop-Block

NOT INCLUDED - NON INCLUSO

 Direction of rotation opposite as machine spindle / *sensò di rotazione contrario al mandrino*

*** STANDARD EQUIPMENT includes:**



								
Spindle / Cono	DIN 69871-CAT		MAS-BT		HSK		CAPTO	
Size / Grandezza	40-50	40-50	40	50	63-80	100	C5-C6	C8
I	65-80-(110*)	80-(110*)	65-80-(110*)	80-(110*)	65-80-(110*)	80-(110*)	65-80-(110*)	80-(110*)
S	35	35	35	41	42	45	38	40
L	150	150	150	156	157	160	153	155

Dual contact spindles available / Disponibilità coni a doppio contatto

*optional

Option / Opzione



bar max

12

Coolant through pin
Refrigerante attraverso il perno



Ø mm

13

Arbor output
Porta fresa



Ø mm max.

10

Weldon output
Weldon



ER-16/ER-11

Double output
Doppia uscita