

T90cn-3.5L Neo

ACT9035L

Technical data

Caratteristiche tecniche


 Ratio
Rapporto
1:1

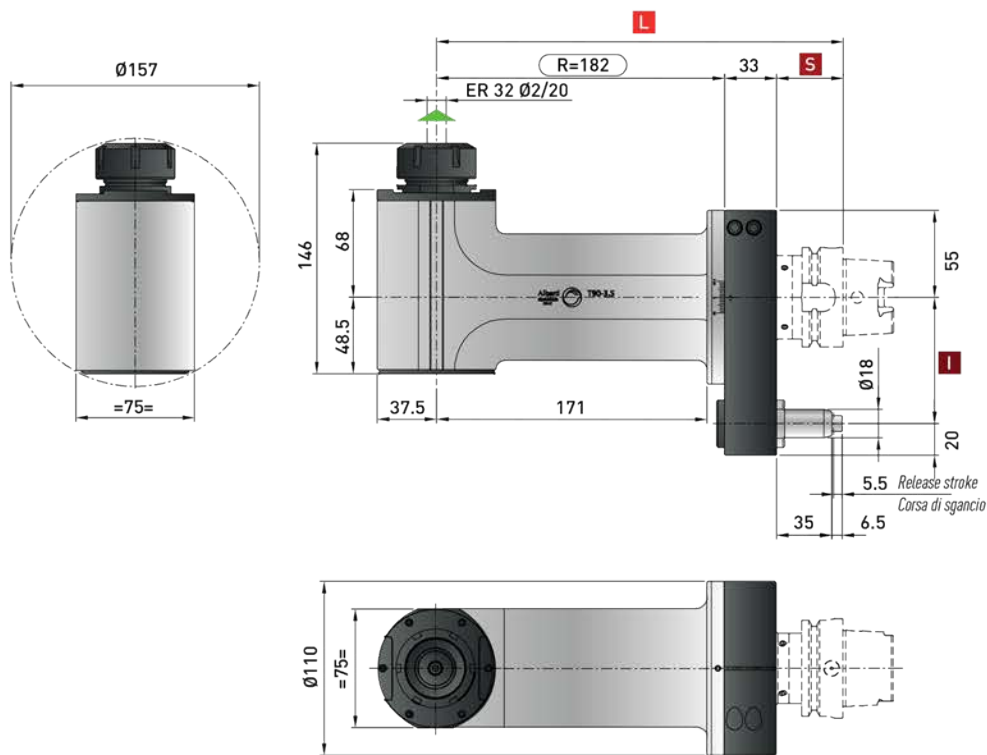
 RPM
Velocità
5.000 min⁻¹

 Max. axial load
Max. carico assiale
1.250 N

 Torque
Momento torcente
70 Nm


 Weight
Peso
13.2 kg

 Tapping
Maschiatura
Max. M16

 Collet
Pinza
ER-32 (ø 2/20 mm)

 Retaining block / Tassello di ritegno / Stop-Block
NOT INCLUDED - NON INCLUSO

Direction of rotation same as machine spindle / senso di rotazione uguale al mandrino


 * **STANDARD EQUIPMENT**
includes:

						
Spindle / Cono	DIN 69871-CAT	MAS-BT	HSK		CAPTO	
Size / Grandezza	50	50	63-80	100	C6	C8
I	80-110	80-110	80-110	80-110	80-110	80-110
S	35	41	42	45	38	40
L	250	256	257	260	253	255

Dual contact spindles available/Disponibilità coni a doppio contatto

*optional

Option / Opzione


 bar max
12

 Coolant through pin
Refrigerante attraverso il perno

 Ø mm
22-27

 Arbor output
Porta fresa

 Ø mm max.
20

 Weldon output
Weldon

ISO-30 HSK-40

 Quick Change
Attacco rapido
Smart Change

ER 32/ER 20

 Double output
Doppia uscita